




containers handler

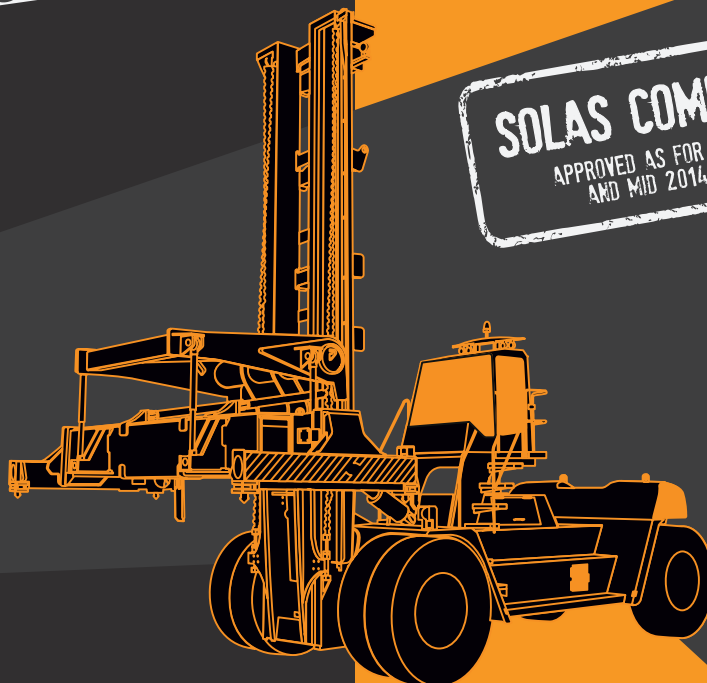

SOLAS COMPLIANT
APPROVED AS FOR OIML R-51
AND MID 2014/32/EU

appsheet



WEIGHING AND LOADING DATA MANAGEMENT DEVICE INSTALLED ON BOARD

The Device is perfectly positioned in the cabin to give you the best view of its display and operability in choosing the data you want to enter before starting the load. Its swivel mount allows you to direct the Device as you wish.



LOAD SENSORS TO DETERMINE THE LIFTING PRESSURE



The load sensors are inserted, by means of special fittings, into the hydraulic pipes that carry the oil to the lifting cylinders in order to measure the pressures involved during the variation of loads and movement.

SENSOR FOR WEIGHT DISPLAY

This sensor installed on the machine allows the display of the weight when the arm enters its intervention area during lifting. Compliant with the SOLAS directive, the system can be extended with two sensors to be able to manage non-standard containers, thus being able to weigh with the boom higher.

INCLINATION SENSOR

The tilt sensor in its small dimensions allows the instrument not to display the weight when the mast exceeds the preset inclination.

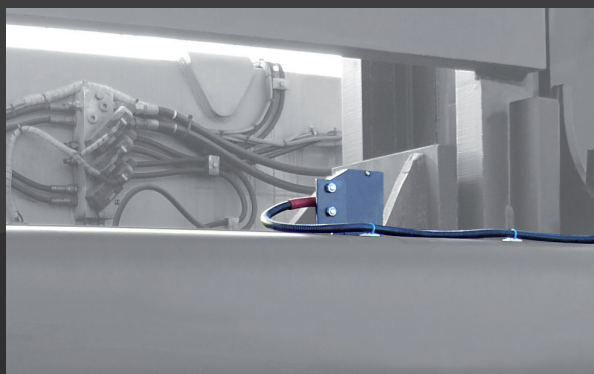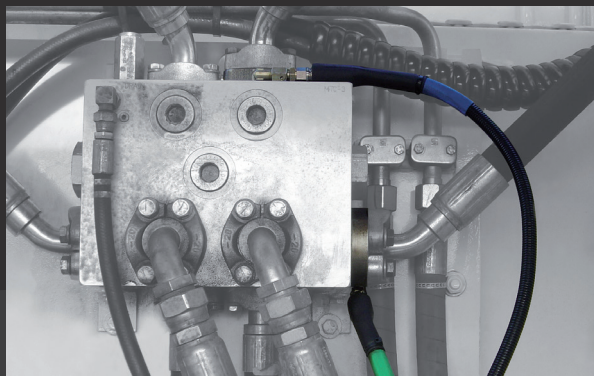

specifications



power supply	9+36Vdc
working temperature	-40+80°C
shocks	40G
device/sensors protection	IP54/IP67
size	150x204x67
display	HD color
maximum capacity (kg)	
measurement error	1%
legal for trade	yes

data management



container booking#	1200
container#	1200
terminals	300
shippers	1200
job orders reception	yes
cloud connection	USB-wireless
loading file download (.csv)	yes

*see products datasheet for complete details